



Rain Test Chamber (IPX5/6)



Mobile phone scan
More product information

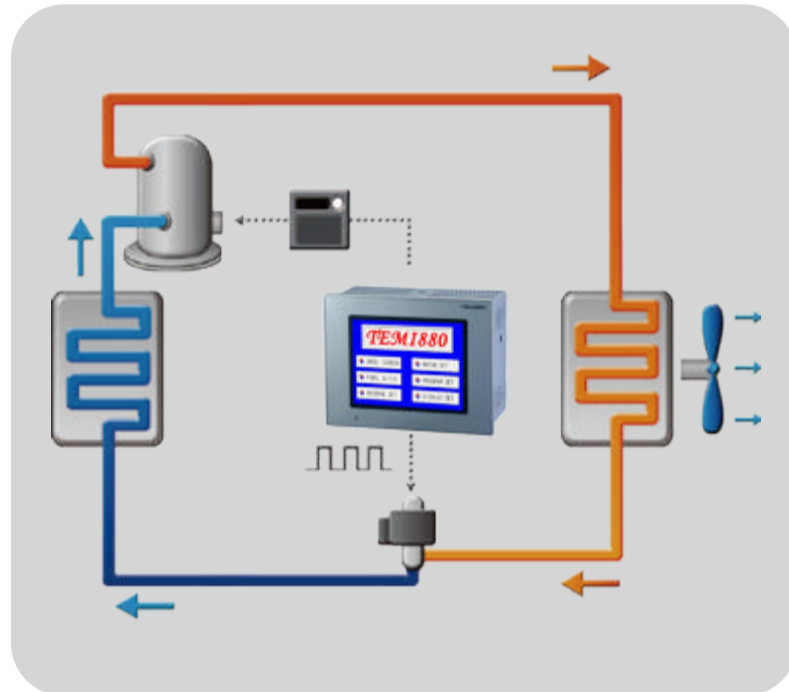

Energy Conservation

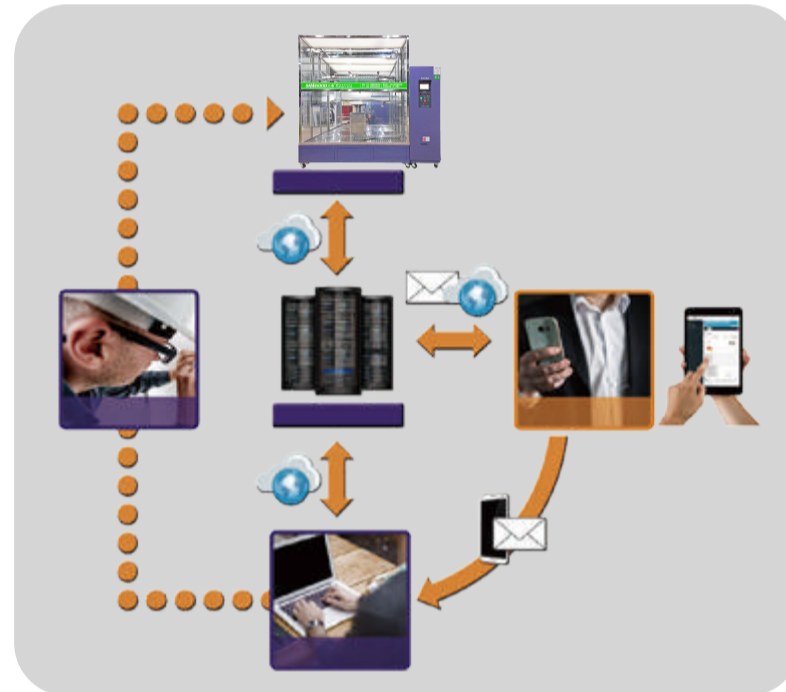

Remote network system



International standard

Circuit System



● Specifications

Model		SM-IPX56-1000
Testing room Size		1000(W)*1000(H)*1000(D)
External Size		3950(W)*1800(H)*1200(D) (2.5m pipeline is detachable)
Power		2.5(KW)
Performance Index	IPX5 Nozzle diameter	φ6.3mm
	IPX5 water flow	12.5L/min
	IPX6 Nozzle diameter	φ12.5mm
	IPX5 water flow	SANWOOD [®] 100L/min Environmental Test Chambers
	Flushing distance	2500mm
	Swing amplitude	±15° (theoretical value)
	Rotating speed	1~20r/min can also be used for speed regulation without joints
Operation Control System	Controller	SANWOOD SH-5500 controller
	Time controller	Imported programmable time computer integrated controller
	Water pressure control	Electromagnetic flowmeter
	Observation	Large area visualization toughened glass door
	Water supply system	Water tank, booster pump
	Power supply	AC380V TN-S
Safety protection		Leakage, short circuit, motor overheating

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website